



On-Set Color Quick Start Guide

document version 0.2
2011.04.18.

On-Set Color™ Quick Start Guide.
Copyright © 2011 Colorfront.
All Rights Reserved.

Table of Contents

[On-Set Color Quick Start Guide](#)

[System Requirements](#)

[Preconditions on OSD workstation](#)

[FTP server installation](#)

[Z800](#)

[Mac Pro](#)

[Z800](#)

[Mac Pro](#)

[Set iPad path in OSD](#)

[Z800](#)

[Mac Pro](#)

[On-Set Color on the iPad](#)

[Licensing](#)

[Installation](#)

[Synchronize the images from OSD to OSC](#)

[Reference](#)

[Grading in OSC](#)

[Send grades back to OSD](#)

[Trademark Notice](#)

System Requirements

Apple iPad or iPad 2 with WiFi connection.



Preconditions on OSD workstation

FTP server installation

Z800

Install an ftp server on the Z800, e.g. install the filezilla like below

- 1) Start the XAMPP Control Panel
- 2) Check the svc checkbox on left next to the filezilla
- 3) Click the Start button next to the filezilla
- 4) Click the admin button next to the filezilla
- 5) Click the user icon on the toolbar - fourth icon from the left -
- 6) Select the general page
- 7) Below the user list view on the right click the Add
- 8) Provide a username like "uni", click OK
- 9) Select the newly created user "uni"
- 10) Check the password checkbox
- 11) Provide the password
- 12) Select the page "Shared folder"
- 13) Click the add to select the root directory of the "ftp server" like C:\uni
- 14) Select the newly added directory and click "set home directory"

Mac Pro

Start XAMPP Control Panel from “/Applications/XAMPP/XAMPP Control” then click on Start button next to the FTP.

Verify ftp connection

Z800

- 1) Get the IP address of the Z800 like `ipconfig /all` in a terminal window
- 2) Test the FTP connection like `ftp < ip address of the z800>`

Mac Pro

- 1) Get the IP address of the Mac Pro like `ifconfig -a` in a terminal window
- 2) Test the FTP connection like `ftp < ip address of the Mac Pro>`

Set iPad path in OSD

Z800

- 1) Start the OSD
- 2) Go to Settings page and GRADE tab, check the IpadPath, this should be C:\uni - the home path of the uni user on the ftp server -
- 3) Select the blue luxtore - press Numpad 2 -
- 4) Drag the thumbnail from the timeline - Numpad 1 - to the blue luxtore

- 5) Press Shift + B
- 6) Check the images saved under C:\uni

Mac Pro

- 1) Start the OSD
- 2) Go to Settings page and GRADE tab, modify the IpadPath to the user's home directory - /Users/<user home directory> -
- 3) Select the blue luxtore - press Numpad 2 -
- 4) Drag the thumbnail from the timeline - Numpad 1 - to the blue luxtore
- 5) Press Shift + B
- 6) Check the images saved under /Users/<user home directory>

On-Set Color on the iPad

Licensing


- 1) Start iTunes.
- 2) Select the iPad
- 3) Click on the serial number, so it changes to show the UDID.
- 4) Select Edit > Copy
- 5) Paste the UDID into an email and email to osd@colorfront.com to request a license.
- 6) Colorfront needs to add the UDID of your iPad to allow the software to run **before** you download the application.

iPad



Installation


Download On-Set Color application from <http://onsetcolor.com/osc/>
Tap on the link to install On-Set Color on your iPad.

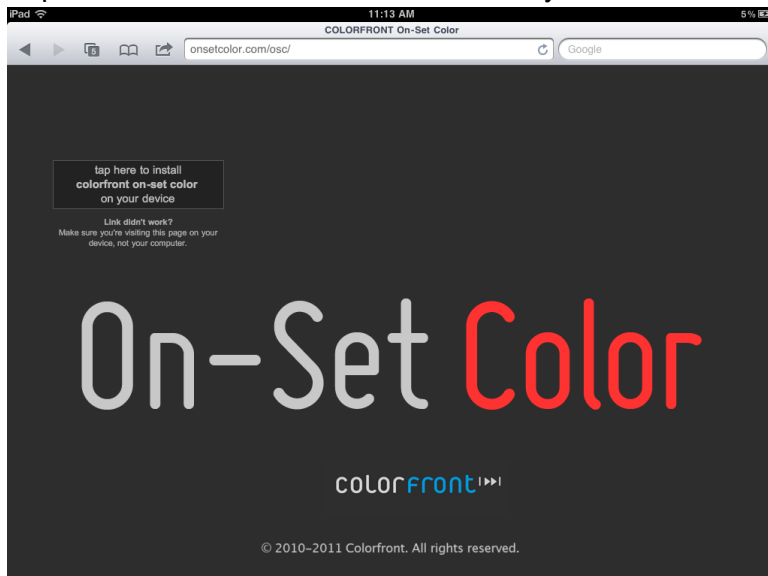

Setup FTP connection in OSC


Make sure the iPad is connected through wifi to the same network which the OSD workstation is connected to.

- 1) Start OSC application on iPad
- 2) Select the Config tab
- 3) Select the Connection
- 4) Provide the IP address of the OSD workstation
- 5) Provide the username and password

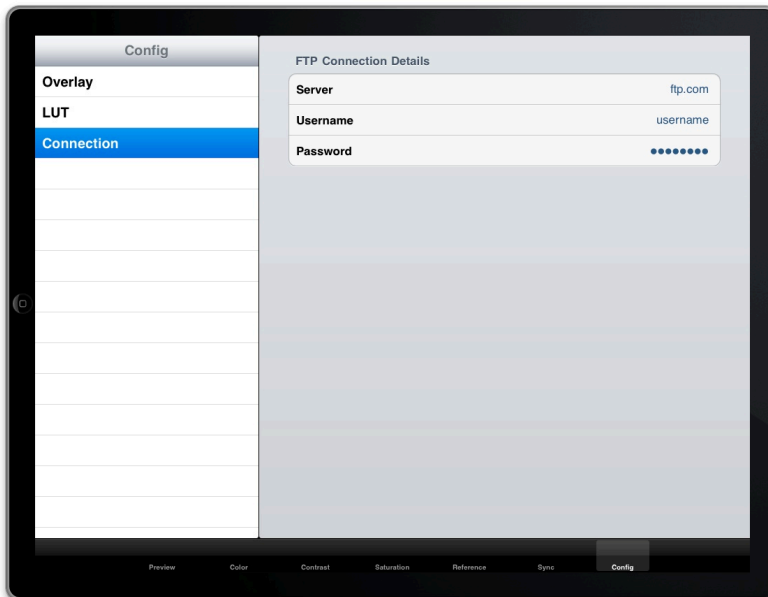


Synchronize the images from OSD to OSC

- 1) Start OSC application on iPad
- 2) Select the Sync tab
- 3) Select the date from the list view
- 4) Tap the "Get Images" button

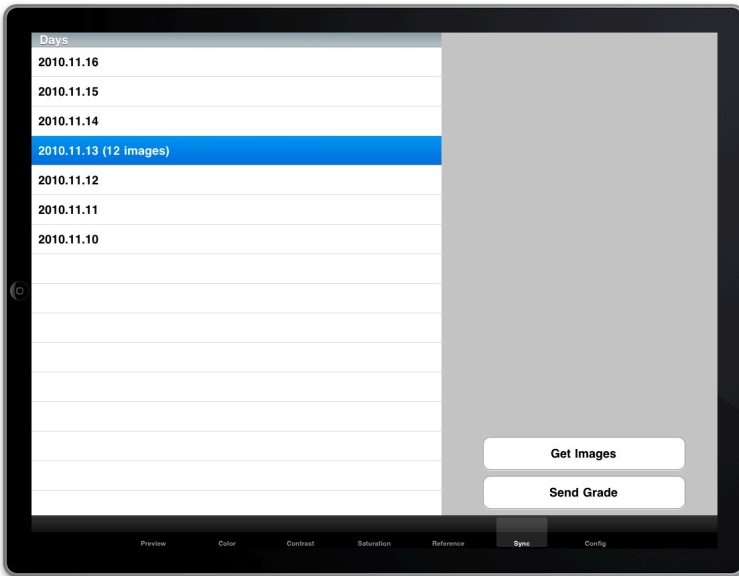

Previously saved iPad grades in OSD are displayed in OSC.


Reference

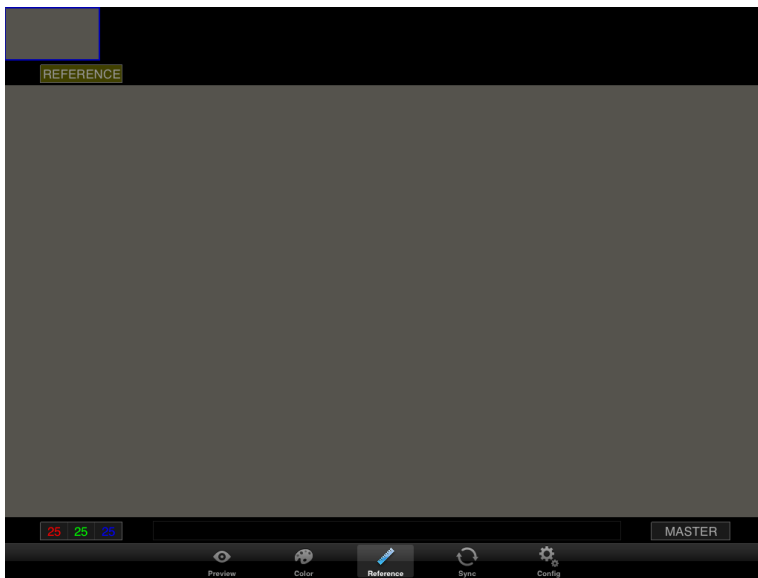

Grey card 18%

Config tab

You can adjust overlay, LUT and ftp connection settings under Config tab.

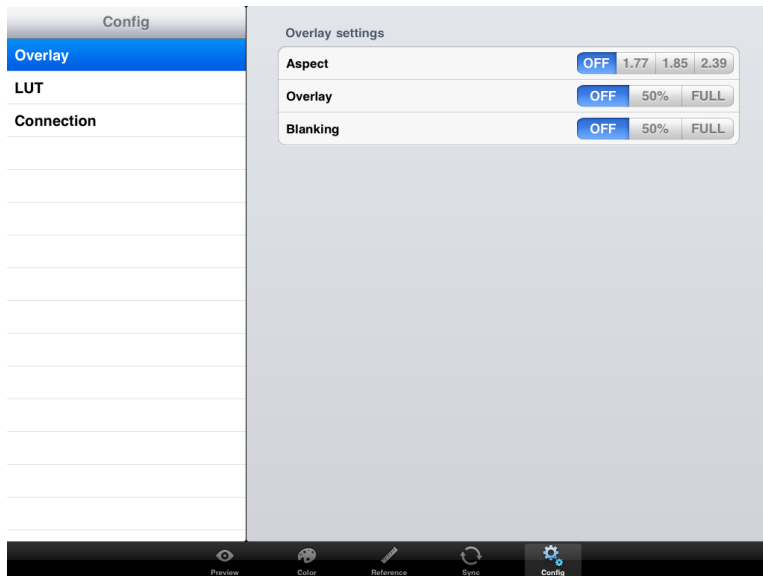

Grading in OSC

Choose between Original / Colorist / Current view

Choose between Master / Highlight / Midtone / Shadow controls


- One finger - color balance
- Two fingers - up / down controls Brightness
- Three fingers - up / down controls Saturation
- Pinch - controls Contrast
- Double tap - reset

Send grades back to OSD

When you are finished setting grades you can send them back to On-Set Dailies.

- 1) Tap Sync tab
- 2) Tap on "Send Grade" button
- 3) In OSD, select iPad luxtore (blue) and press Shift + V to load OSC generated grades.

Note: for any questions, comments or suggestions please contact us at osd@colorfront.com!

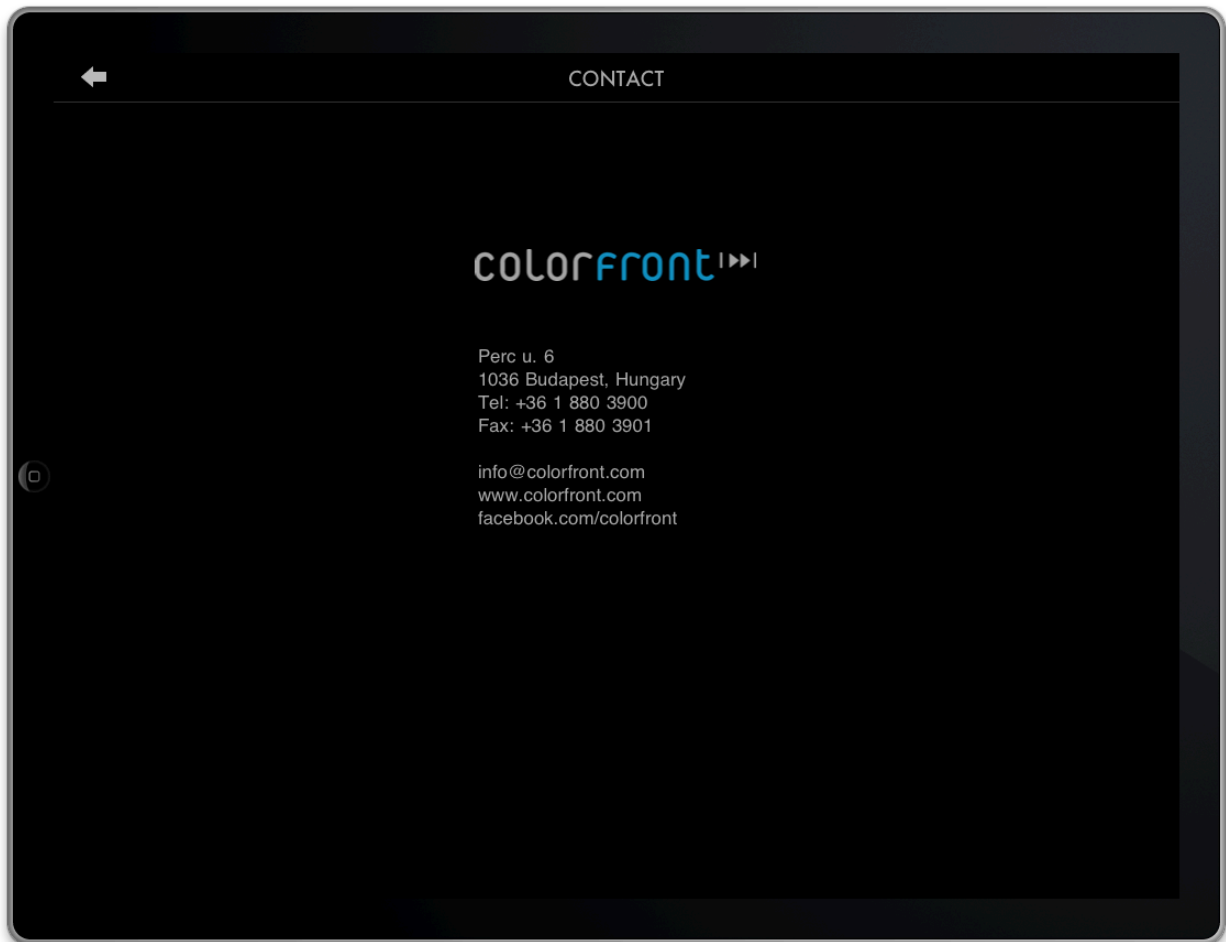

Trademark Notice

Colorfront, On-Set Color and On-Set Dailies are trademarks of Colorfront Kft.

All other brand names, product names or trademarks belong to their respective holders.